

Linearossa W3

Portable Headphone Amplifier




Quick User Guide

Front connections and actuators



Rear connections and actuators

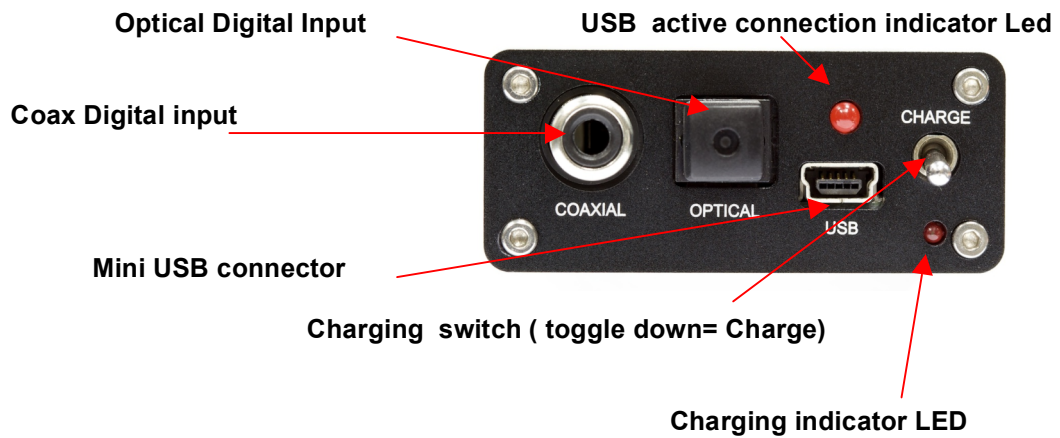

Linearossa W3 technical Specifications

Output Level; 5Vpp
Distortion at max output (THD); 0.25%
16 bit –DAC conversion
DAC sampling 44.1Khz
Output impedance; 16 to 600 Ohm

Frequency response;10Hz – 25Khz +/- 0.6dB
USB do not need driver
Compatible with Mac, Linux, and Windows
Long life Li-ion battery (more then 24hrs)
Weight 110Gr

For assistance you can contact your reseller or by mail sales@linearossa.org

